

Starlight Mountains Quilt Pattern

Small Star Block # 1

Unfinished Size - 8 1/2 x 8 1/2 inches

All seams are a scant 1/4 inch

Cutting Instructions for 6 blocks:

Color B (Green) -

24 squares: 2 7/8 x 2 7/8 in

Color C (White) -

6 squares: 4 1/2 x 4 1/2 in

Color D (Light blue) -


6 squares: 5 1/4 x 5 1/4 in

24 squares: 2 1/2 x 2 1/2 in


1. We will be using the 4 at 1 time, no waste method to make our Flying Geese.

You will need:

6 Color D - 5 1/4 x 5 1/4 inch squares and 24 Color B - 2 7/8 x 2 7/8 inch squares.



2. With right sides of fabric together, lay 2 small squares on opposite corners of the large square. Draw a diagonal line from the top corner to the bottom corner, on the back of both small squares. Pin in place. Sew a scant 1/4 inch seam on both sides of the drawn line. Cut on the center line. Press seam toward the small triangles.




Black line is drawn line

Red line is sewn line

3. Lay 1 small square down in the corner, with right sides of fabric together. Draw a diagonal line from corner to corner, on the back of the small square. Sew a scant 1/4 inch seam on both sides of the drawn line.

Cut on the center line and press toward the small triangle. For best results, press with a dry iron.




Finished flying geese will measure: 2 1/2 x 4 1/2 inches.

Trim if needed. **You will have 24 flying geese.**

4. Lay out 4 D/B flying geese, 4 Color D - 2 1/2 x 2 1/2 inch squares and 1 Color C - 4 1/2 x 4 1/2 inch square. With right sides of fabric together, pin in place and sew the pieces to form three rows. Press the seams in alternating directions, as shown below.

Next, with right sides of fabric together, nest the seams so they interlock. Pin in place and sew together. Press the seams as shown below. **This block will measure: 8 1/2 x 8 1/2 inches.** Trim if needed.

You will need 6 of these blocks.

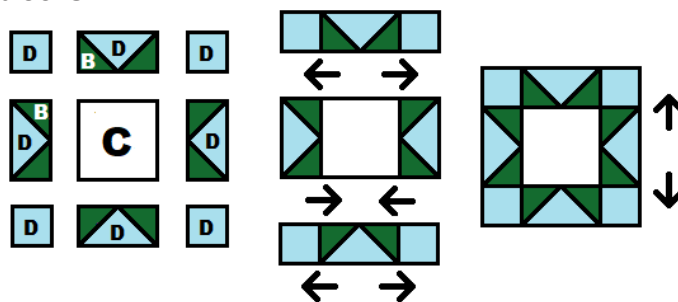

#NQCBlockChallenge

#HappyCloudCreations

Starlight Mountains Quilt Pattern

Pattern is for one person use. Please do NOT Copy, Sell or Distribute this Pattern without consent. Pattern design by Andrea Smith of HappyCloudCreations.com Copyright 2020


Small Star Block # 1

Page 1

Starlight Mountains Quilt Pattern by Andrea Smith of Happy Cloud Creations

Small Star Block #1

Color Your Own!

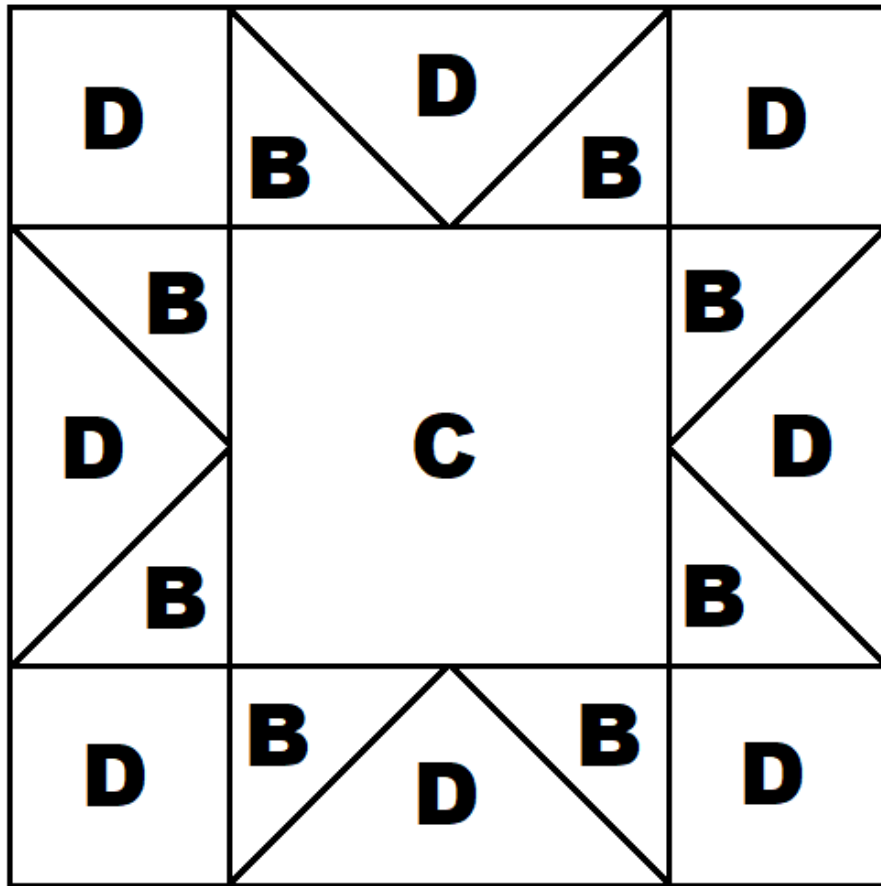

#NQCBlockChallenge
#HappyCloudCreations

Starlight Mountains Quilt Pattern
Andrea Smith of HappyCloudCreations.com Copyright 2020

Small Star Block #1
Coloring Sheet